


Quilt Top Assembly

Assemble the quilt top using



(1) Block 1



(4) Block 2




(4) Block 3



(4) Block 4



(8) Block 5



(4) Block 6

the following Blocks (each $12\frac{1}{2}'' \times 12\frac{1}{2}''$ unfinished):

Arrange the blocks as shown below, rotating the blocks to match the following diagram. Sew blocks into rows then sew rows together, pressing all seams open. The quilt top should measure $60\frac{1}{2}'' \times 60\frac{1}{2}''$.

6 5 4 5 5 3 2

3 4 2 1 2 5 3

2 3

6 5 4 5


6

5

4

5

6

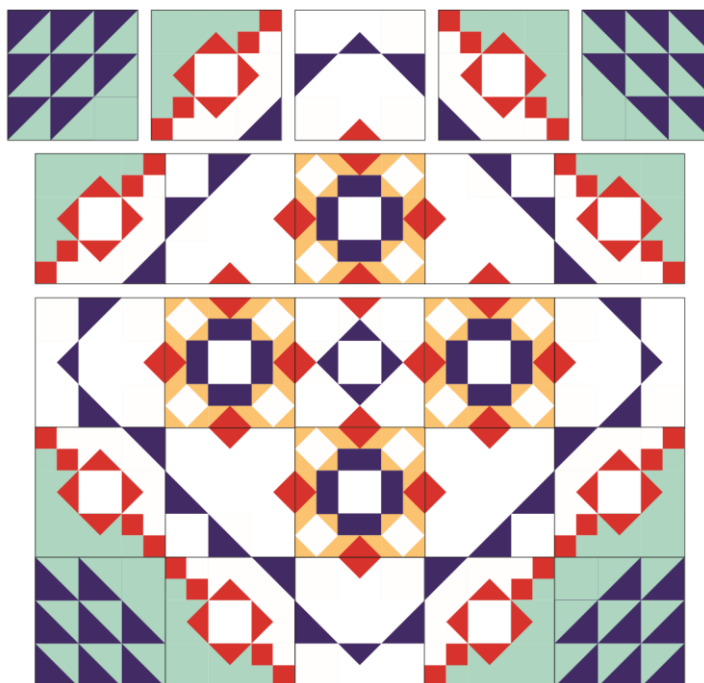

Finishing

Backing: $3\frac{7}{8}$ yards

Batting: $70'' \times 70''$

Binding (straight grain): $\frac{5}{8}$ yard

1. Remove selvages from backing fabric, cut into 2 pieces ($70'' \times \text{WOF}$) and sew backing pieces together along the trimmed selvedge edges using a $\frac{1}{2}''$ seam, pressing seams open. Trim backing to approx. $70'' \times 70''$.
2. Layer the quilt top, batting, and backing. Baste and quilt as desired.
3. Cut the binding fabric into 7 strips $2\frac{1}{2}'' \times \text{WOF}$. Trim off selvages and sew together end-to-end to make the binding. Bind and enjoy your quilt!